



- >> Flush mounted, non vision door or partition grille.
- >> Used to allow for air movement between two conditioned spaces while preventing vision.
- >> Constructed of V shape inverted blades assembled horizontally one above the other, with fixed spacing to a frame called the fixed frame.
- >> Fixed frame is installed at one side of the partition, while a sliding frame is fixed on the other side.
- >> Sliding frame enables the use of the door grille to suit different thickness of the partition.

- >> Minimum partition thickness : 25 mm
- >> Maximum partition thickness : 55 mm


FIXING

- >> Visible screw fixing



FINISHING

- >> NATURAL ANODIZED ALUMINIUM FINISH.
- >> POWDER COATED TO RAL CODES

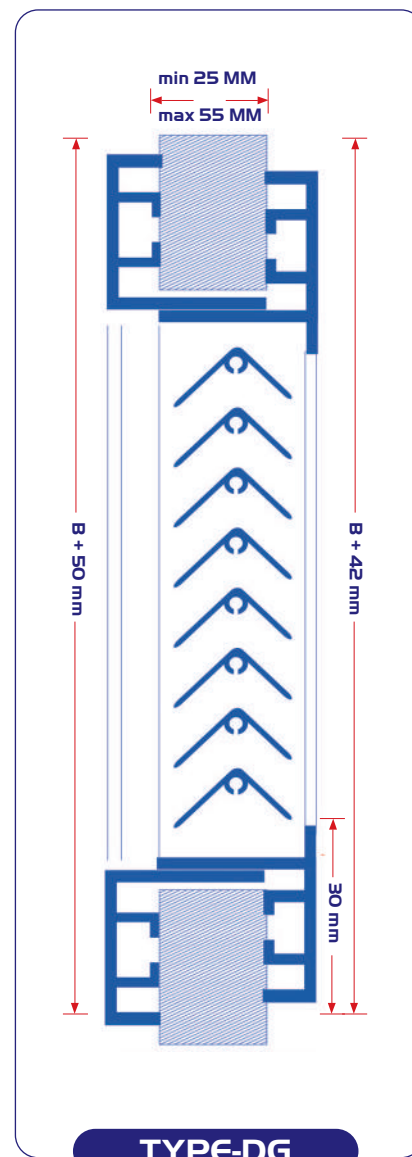

TYPE-DG

Ordering Key:

D	G	SIZE
DG: DOOR TRANSFER GRILLE		
SIZE: WIDTH X HEIGHT		

